

Coastal Applications Definition



A guideline to assist with the selection of Zipscreen products suitable for coastal applications.



CORROSIVITY CATEGORIES

The below outlines corrosive zone classes as specified in the Australian Standard AS 4312 and the associated warranty period.

CLASS	DISTANCE FROM SHORE		COASTAL APPROVED SYSTEM WARRANTY
C5	0 -100m	[OPEN OCEAN]	12 months
C4	0 -100m	[SHELTERED COVE]	12 months
C3	100m - 1km	[SHELTERED COVE]	5 years
C2	1km - 50km	[OPEN OCEAN]	5 years
C2	50km and beyond - Non heated or air conditioned building		5 years
C1	Continually heated or air conditioned building		

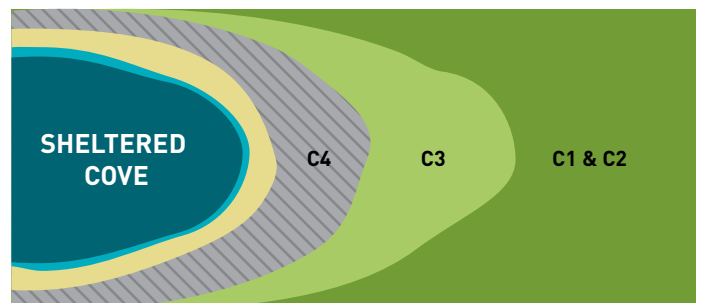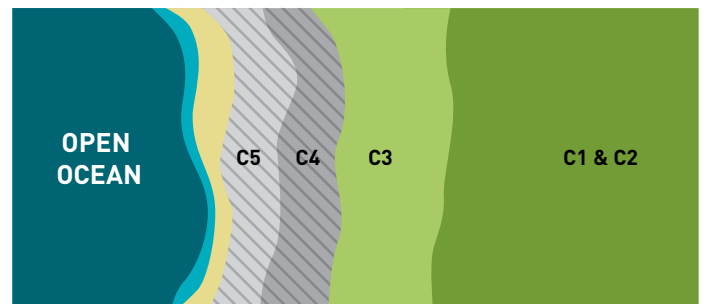

Refer to sytem warranty documentation for further details.

*Coastal approved systems must use aluminium tube to qualify. Where open brackets are required, they must be stainless steel.