BRACKETS | DOUBLE

FEATURES & BENEFITS

- Combine sheer fabric and block-out fabric in one installation.
- Ultimate privacy while still allowing light into any given room.
- Easy-Lock assembly to simplify installation.
- Available in multiple configurations for every application.
- HD Adapter increases the standard bracket's strength for larger motors.
- Bracket covers offer a finished solution for Slim Profile double brackets.

MOUNTING SOLUTIONS







TOP **RECESS FACE**




OPTIONS




HD ADAPTER



RB09 Direct with Chain Guide

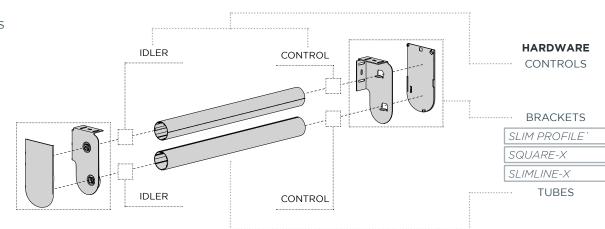

FABRIC ORIENTATION

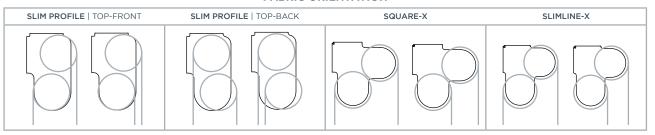

TECHNICAL DATA

SLIM PROFILE WITH RB09: TOP FRONT TOP BACK





INCREASED DOUBLE BRACKET CAPACITY WITH THE HD ADAPTER

The HD Adapter is required for all 3.0N and 6.0Nm motors.







.	
m	(x2)
	AX ROLL SIZE
	Σ

	MAX ROLL SIZE	BRACKET COVE	RB07/08	RB09	1.1Nm/2.0Nm 5V	3.0Nm 12V	6.0Nm AC	ESU / ESW	RB07/08	RB09	EASY-LINK	
	70mm	J	V	V	V	V	V		V	V	V	
•	70mm	J	J	J	J	J	J		J	J	J	
	70mm		J	J	J	J	J		J	J	J	
	65mm		J	J	J	J	J		J	J		

MOTOR & HD ADAPTER

WINDER

ERS

MOTOR

SPRINGS

					MAX ROI	BRACKE	RB07/08	RB09	1.1Nm/2.C	3.0Nm 12	6.0Nm A	ESU / ES	RB07/08	RB09	EASY-LIN
SLIM PROFILE TOP FRONT	PROFILE TOP FRONT SLIM Conceal both rolls. The Top Front chain improved operating Slim profile bracket		control is installed		70mm	J	J	J	J	J	J		V	J	J
PROFILE TOP			nt in living space. d brackets have the		70mm	J	V	V	J	V	V		V	J	J
SQUARE-X		Square profile bracket with both tube controls located on the same bracket side.		70mm		J	V	V	V	V		V	J	J	
SLIM- LINE-X	P	Square profile brack sides. Separating or			65mm		J	J	✓	√	√		√	1	

UPGRADE

IDLER

operation for the user.